

SHORT THROW POCKET LED PROJECTOR ML750ST



PALM-SIZED LED SHORT THROW PROJECTOR



Project a 50 inch diagonal image from only 32 inches away with the ML750ST's powerful short throw lens



The ML750ST's short throw lens delivers a big picture in a small space



Utilize the built-in Office Viewer to present PowerPoint Presentations, Word Docs, and Excel Spreadsheets



Wireless Presentations, Device Mirroring, and Multimedia Playback capability with integrated HDCast Pro via optional WUSB WiFi adapter



Powerful LED light source provides consistent brightness over the life of the ML750ST and no lamps to replace



Engineered for mobile communicators or power users on the go, the ML750ST's powerful short throw lens delivers presentations, pictures, and videos in environments with limited space for projection. Experience ultra-bright images, crystal clear text, and sharp vibrant videos from a palm sized projector with the power and performance of a full sized projector. The ML750ST delivers a big picture in small spaces anywhere, anytime.

With an impressive 700 ANSI lumens, 20,000:1 contrast ratio, auto keystone, and Rec709 color gamut, the ML750ST delivers vibrant razor sharp WXGA images when viewing presentations and spreadsheets in the office or meetings in the field. The integrated Media Player can be utilized to playback movies, view images, or power digital signage.

Designed for traveling professionals and power-users, the palm-sized ML750ST weighs less than one pound and features an integrated HDCast Pro for Device Mirroring and Multimedia Playback. This feature allows mirroring of Android, iOS, and Windows devices, presentation viewing, and multimedia playback of music, pictures, and videos. The state of the art LED light source is rated to last over 20,000 hours, greatly reducing the need to replace the LED light source.



FITS IN YOUR PALM

CONNECTIVITY (May require optional accessories)



COMPUTERS



SMART PHONES



TABLETS



BLU-RAY/DVD PLAYERS



SET TOP BOXES



CAMCORDERS



GAME CONSOLES



DIGITAL CAMERAS



Apple TV®



Roku®



USB

microSD

SHORT THROW POCKET LED PROJECTOR – ML750ST

OPTICAL/TECHNICAL SPECIFICATIONS

Display Technology	Single 0.45" DMD DLP® Technology by Texas Instruments™
Native Resolution	WXGA (1280 x 800)
Maximum Resolution	VGA: WSXGA+ (1680 x 1050), HDMI: HD (1920 x 1080)
Brightness	700 Lumens
Contrast Ratio	20,000:1 (full on/full off)
Displayable Colors	16.7 Million
Lamp Life	20,000 (LED Life) (hrs)
Keystone Correction	±40° Vertical (Auto Keystone)
Uniformity	88%
Offset	100%
Aspect Ratio	16:10 Native, 16:9 and 4:3 compatible
Throw Ratio (distance/Width)	0.8:1
Projection Distance	16" - 135"
Image Size (Diagonal)	25" - 200" Diagonal 16:10
Projection Lens	F1.9; f=8.02mm, Fixed
Audio	1.5W Speaker
Noise Level (Normal/Bright)	22dB
Remote Control	Full Function Mini Remote Control
Operating Temperature	5 - 40°C, 80% Humidity (Max), 2500m Altitude (Max)
Power Supply	100-240V, 50-60 Hz
Power Consumption	77W Bright mode (< 0.5W Standby)
Memory	1.5GB Onboard memory, microSD slot supports up to 64GB
USB Drive	Support USB Thumb Drives only; will not support external USB hard drives
High Altitude	Operating Temp @ Sea Level to 10000 feet = 23C (max); must manually switch to high altitude mode @ 5000 feet & above (using OSD)
Lamp Type*	LED

COMPATIBILITY SPECIFICATIONS

Computer Compatibility	WSXGA+, SXGA+, WXGA+, WXGA, SXGA, XGA, SVGA, VGA resized, VESA, PC and Macintosh compatible
Video Input Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
3D Compatibility*	3D Ready -The 3D features of Optoma projectors can only be used with compatible 3D content. Typical applications include use with 3D educational or 3D design and modelling systems.
Vertical Scan Rate	24 - 120Hz (120Hz for 3D)
Horizontal Scan Rate	49.64 kHz
Latency	17ms
User Controls	12 Languages: English, French, Spanish, Portuguese (Brazilian), German, Russian, Italian, Polish, Dutch, Swedish, Greek, Turkish
I/O Connection Ports	HDMI + MHL v2.0, Universal I/O - VGA, microSD-slot, USB-A reader with support for USB Wireless dongle, Audio out
Loop Through (Audio)	Yes


PHYSICAL SPECIFICATIONS

Security	Kensington® Lock
Weight	Projector: 12.8 oz. Power adaptor: 4.8 oz.
Dimensions (W x H x D)	4.4" x 1.6" x 4.1" (112.5 x 40.5 x 105 mm)

INTEGRATED HDCAST PRO TECHNICAL AND FUNCTIONALITY

ML750ST includes an integrated HDcast Pro Device Mirroring and Multimedia Playback Device. WUSB wireless dongle is required to use HDcast Pro. WUSB is optional and can be purchased separately. For HDcast Pro Technical Specifications (codecs, containers, etc), please download the HDcast Pro datasheet from <http://www.optomausa.com>.

UHFHLYLD compatible 3D signal from a compatible source device.
LWBXUFHDLIHGSHSHGHWSRBDDFWRUDFOFXGLEULWHRGHLGHSODBRGHD
XDHBLYLRPHWDORGLWLRDGBRUHLWXBUXFHEULWHEDGDFUHDHBYHUWLPHD

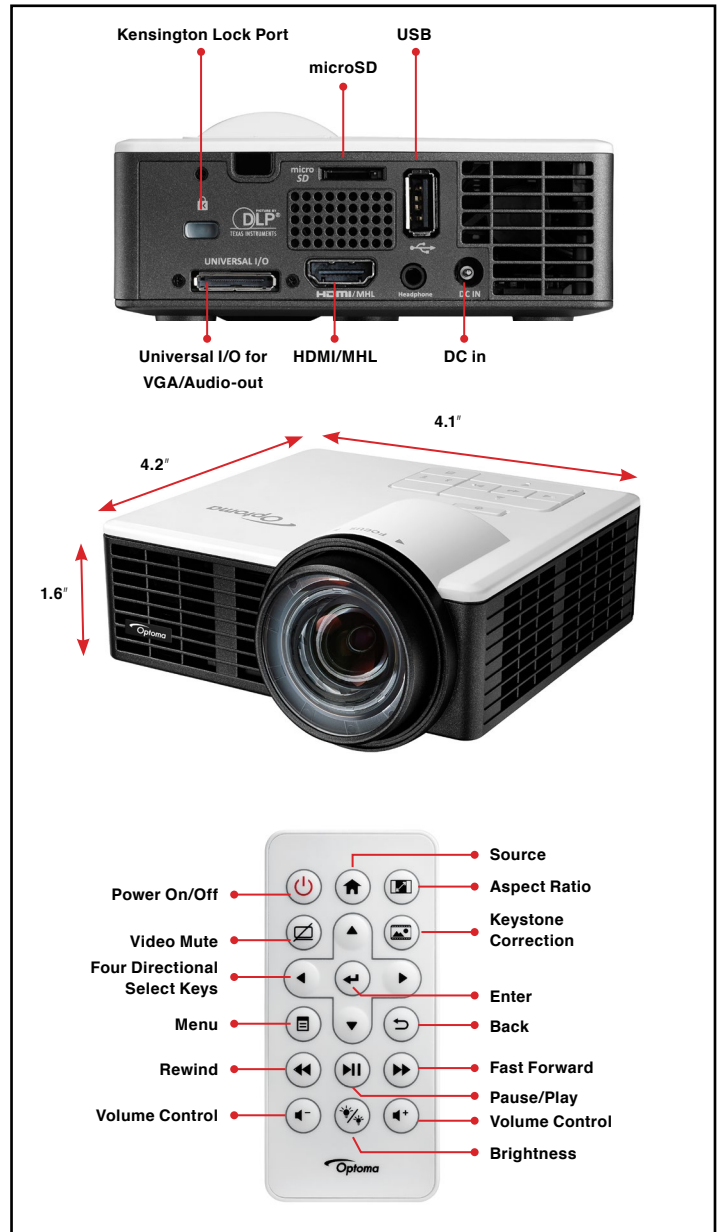

Warranty

1 Year Optoma Parts and Labor

In the Box (Standard Accessories)

ML750ST projector, Carry bag, AC power cord, universal I/O cable, remote control, battery for the remote, quick start card

Optional Accessories

ZD302 DLP Link 3D glasses, WUSB 802.11-N WiFi Dongle

Accessory Part Numbers

Remote: BR-ML75N	Universal to VGA/audio cable:
AC power adapter: BC-ML55PDX	BC-PK5AVGX
AC power cord: BC-PUPNX02	Mini tripod: BM-1021N
Wireless USB Adapter: SP.71Z01GC01	Carry Bag: BK-ML70S

UPC 796435 41 995 0

www.OptomaUSA.com



Copyright © 2016 Optoma Technology, Inc. DLP® and the DLP logo are registered trademarks of Texas Instruments™. All other trademarks are the property of their respective owners. All specifications subject to change at any time. 06182018